

無油葉片式真空泵浦



RV-10V



RV-16V · RV-25V · RV-40V




RVX-25 · RVX-40


SPECIFICATION

型號 Model	周波數 Hz	排氣速度 L / min	常用真空度		馬達極數 Pole	相 φ	馬達電壓 Volt	馬達出力 Watt	噪音值 dB	使用溫度 °C
			mmHg	Kpa						
RV-10V	50 / 60	100 / 120	-720	-96	4	1	100Vor 220V	250W	—	7~40°C
RV-16V	50 / 60	230 / 280	-450	-60	4	3	220V or 380V	400W	64 / 65	7~40°C
RV-25V	50 / 60	400 / 480	-450	-60	4	3		750W	64 / 65	7~40°C
RV-40V	50 / 60	570 / 680	-450	-60	4	3		1500W	70 / 71	7~40°C
RVX-25	50 / 60	405 / 480	-450	-60	4	3		1500W	—	7~40°C
RVX-40	50 / 60	575 / 685	-450	-60	4	3		2200W	—	7~40°C


RV-10

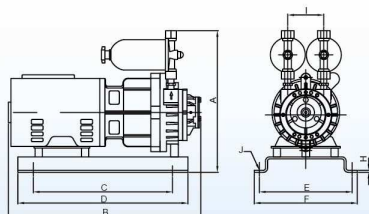

RV-16V · RV25 · RV-40V

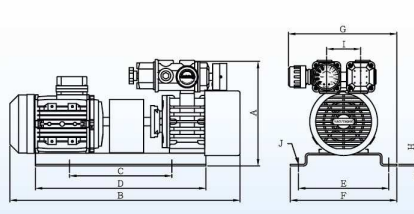

RVX-25 · RVX-40

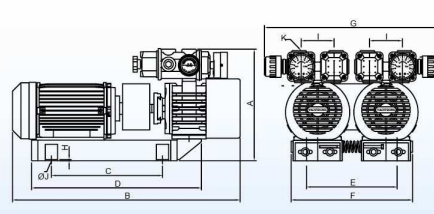

DIMENSION

Model	A	B	C	D	E	F	G	H	I	J	K	Weight
RV-10V	268	374	270	330	180	200	0	4	70	φ 6	PT1/4"	15KG
RV-16V	248	482	304	365	205	230	270	4.5	90	φ 11	PT3/4"	22KG
RV-25V	260	540	240	400	212	250	280	4	90	φ 11	PT3/4"	26KG
RV-40V	275	640	310	470	220	250	280	4	90	φ 11	PT3/4"	37KG
RVX-25	275	553	270	410	220	310	453	3	90	φ 10	PT3/4"	53KG
RVX-40	290	648	305	475	240	310	453	3	90	φ 10	PT3/4"	69KG