


■ 多功能真空发生器（多级高真空大流量型式）

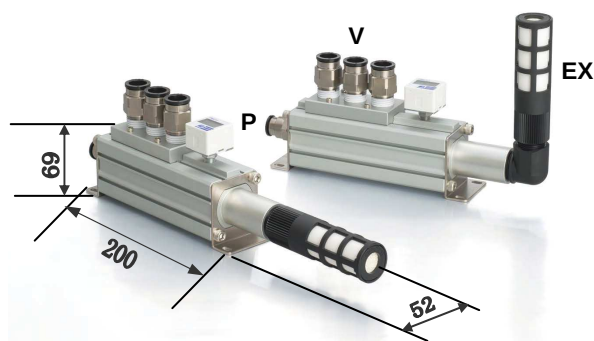

特性参数：

适用流体	空气
适用压力	0.3~0.7 MPa
额定压力	0.35 MPa
适用温度	5~50 °C

型号选择	喷嘴 (mm)	V (mm)	P (mm)	真空度 (kPa)	吸入流量 (L/min)	消耗流量 (L/min)	重量 (g)		
VVVE16-0402S-G	1.6	Rc1/2	Rc1/4	-90	180	105	1016		
VVVE16-0408S-G	1.6	Rc1/2	8	-90	180	105	1030		
VVVE16-0410S-G	1.6	Rc1/2	10	-90	180	105	1035		
VVVE16-0412S-G	1.6	Rc1/2	12	-90	180	105	1053		
VVVE16-1202S-G	1.6	12	Rc1/4	-90	180	105	1059		
VVVE16-1208S-G	1.6	12	8	-90	180	105	1073		
VVVE16-1210S-G	1.6	12	10	-90	180	105	1078		
VVVE16-1212S-G	1.6	12	12	-90	180	105	1096		
VVVE16-1602S-G	1.6	16	Rc1/4	-90	180	105	1079		
VVVE16-1608S-G	1.6	16	8	-90	180	105	1093		
VVVE16-1610S-G	1.6	16	10	-90	180	105	1098		
VVVE16-1612S-G	1.6	16	12	-90	180	105	1116		
VVVE25-0402S-G	2.5	Rc1/2	Rc1/4	-94	430	270	1016		
VVVE25-0408S-G	2.5	Rc1/2	8	-94	430	270	1030		
VVVE25-0410S-G	2.5	Rc1/2	10	-94	430	270	1035		
VVVE25-0412S-G	2.5	Rc1/2	12	-94	430	270	1053		
VVVE25-1202S-G	2.5	12	Rc1/4	-94	430	270	1059		
VVVE25-1208S-G	2.5	12	8	-94	430	270	1073		
VVVE25-1210S-G	2.5	12	10	-94	430	270	1078		
VVVE25-1212S-G	2.5	12	12	-94	430	270	1096		
VVVE25-1602S-G	2.5	16	Rc1/4	-94	430	270	1079		
VVVE25-1608S-G	2.5	16	8	-94	430	270	1093		
VVVE25-1610S-G	2.5	16	10	-94	430	270	1098		
VVVE25-1612S-G	2.5	16	12	-94	430	270	1116		
VVVE27-0402S-G	2.7	Rc1/2	Rc1/4	-94	500	315	1016		
VVVE27-0408S-G	2.7	Rc1/2	8	-94	500	315	1030		
VVVE27-0410S-G	2.7	Rc1/2	10	-94	500	315	1035		
VVVE27-0412S-G	2.7	Rc1/2	12	-94	500	315	1053		
VVVE27-1202S-G	2.7	12	Rc1/4	-94	500	315	1059		
VVVE27-1208S-G	2.7	12	8	-94	500	315	1073		
VVVE27-1210S-G	2.7	12	10	-94	500	315	1078		
VVVE27-1212S-G	2.7	12	12	-94	500	315	1096		
VVVE27-1602S-G	2.7	16	Rc1/4	-94	500	315	1079		
VVVE27-1608S-G	2.7	16	8	-94	500	315	1093		
VVVE27-1610S-G	2.7	16	10	-94	500	315	1098		
VVVE27-1612S-G	2.7	16	12	-94	500	315	1116		

