

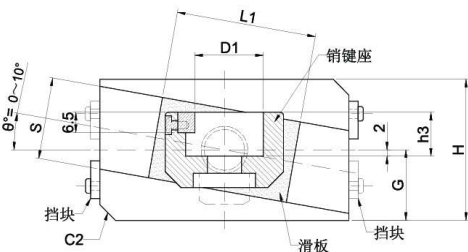



■ 活型芯（标准固定式） P06-E010

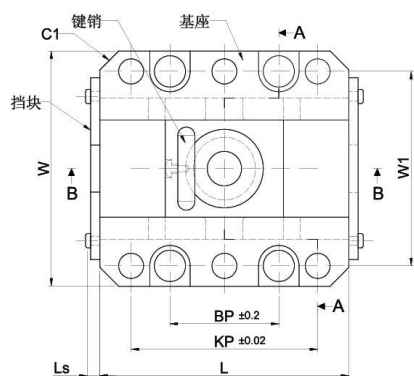

B-B 断面

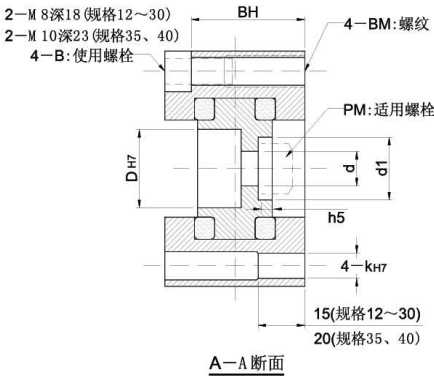

A-A 断面



适用的斜导柱

活型芯（标准固定式）



[单位: mm]

型号选择		D	W	W1	L	BP	KP	H	G	h3	L1	S	B	BH
型号	角度 θ°													
P06-E01012	0 1 2 3 4 5 6 7 8 9 10	12	56	45	55	21	42	35	17.5	10	35	20	M6	28.5
P06-E01016		16	60	48	65	25	46	36	18	11	40	20	M6	29.5
P06-E01020		20	68	55	70	25	50	43	21.5	13	40	24	M8	34.5
P06-E01025		25	75	62	80	35	60	45	22.5	15	45	26	M8	36.5
P06-E01030		30	81	68	95	50	75	54	27	17	55	30	M8	45.5
P06-E01035		35	98	81	110	50	85	60	30	20	70	34	M10	49.5
P06-E01040		40	105	88	120	60	95	64	32	22	80	38	M10	53.5

型号	BM	K	d	d1	h5	C1	C2	Ls	D1	h4	PM		
P06-E01012	M8	6	5.5	-	-	5	-	4.65	11	13	M5		
P06-E01016	M8	6	9	16	3	6	-	4.65	15	14	M8		
P06-E01020	M10	8	11	20	5.5	6	5	4.65	18	16	M10		
P06-E01025	M10	8	11	20	5.5	6	5	4.65	22	18	M10		
P06-E01030	M10	8	11	20	3.5	6	5	4.65	27.5	20	M10		
P06-E01035	M12	10	13	26	5.5	6	5	5.2	32.5	23	M12		
P06-E01040	M12	10	13	26	5.5	6	5	5.2	37.5	25	M12		