


■ 快插接头（内孔六角式） P08-C402

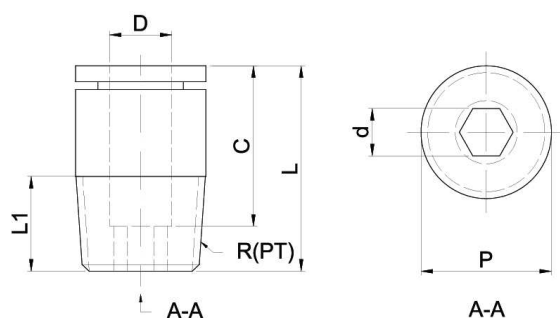

[单位: mm]

型号选择 型号	R(PT)	适用软管 外径 D	P	C	L	L1	六角内孔 d	温度		
P08-C40201-4	1/8	4	9.7	14.9	21.0	8	2.5	60℃		
P08-C40201-6	1/8	6	11.8	17.0	22.6	8	4.0	60℃		
P08-C40201-8	1/8	8	13.7	18.2	27.9	8	5.0	60℃		
P08-C40202-6	1/4	6	14.0	17.0	22.6	11	4.0	60℃		
P08-C40202-8	1/4	8	13.7	18.2	26.6	11	6.0	60℃		
P08-C40202-10	1/4	10	17.7	20.7	29.8	11	6.0	60℃		
P08-C40203-8	3/8	8	16.8	18.2	23.9	12	6.0	60℃		
P08-C40203-10	3/8	10	17.7	20.7	29.3	12	6.0	60℃		
P08-C40203-12	3/8	12	20.8	23.3	31.9	12	8.0	60℃		
P08-C40204-10	1/2	10	20.8	20.7	30.3	15	8.0	60℃		
P08-C40204-12	1/2	12	20.8	23.3	33.9	15	8.0	60℃		
P08-C40201-6-F	1/8	6	11.8	17.0	22.6	8	4.0	100℃		
P08-C40201-8-F	1/8	8	13.7	18.2	27.9	8	5.0	100℃		
P08-C40202-6-F	1/4	6	14.0	17.0	22.6	11	4.0	100℃		
P08-C40202-8-F	1/4	8	13.7	18.2	26.6	11	6.0	100℃		
P08-C40202-10-F	1/4	10	17.7	20.7	29.8	11	6.0	100℃		
P08-C40203-8-F	3/8	8	16.8	18.2	23.9	12	6.0	100℃		
P08-C40203-10-F	3/8	10	17.7	20.7	29.3	12	6.0	100℃		