



■ 快插接头（直角L式） P08-C403

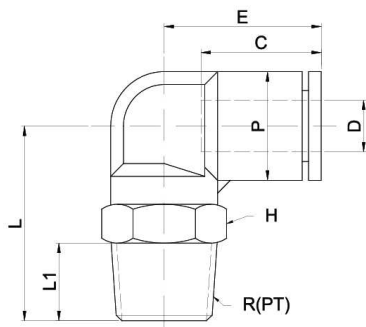

[单位: mm]

型号选择 型号	R(PT)	适用软管 外径 D	P	C	E	L	L1	H	温度
P08-C40301-4	1/8	4	10.0	14.9	18.7	22.0	8	10	60℃
P08-C40301-6	1/8	6	12.5	17.0	20.3	22.5	8	10	60℃
P08-C40301-8	1/8	8	14.5	18.4	22.7	28.0	8	12	60℃
P08-C40301-10	1/8	10	17.5	20.2	26.2	33.0	8	17	60℃
P08-C40302-4	1/4	4	10.0	14.9	18.0	26.3	11	14	60℃
P08-C40302-6	1/4	6	12.5	16.8	19.8	28.0	11	14	60℃
P08-C40302-8	1/4	8	14.5	18.4	23.7	28.0	11	14	60℃
P08-C40302-10	1/4	10	17.5	20.2	26.0	28.5	11	14	60℃
P08-C40302-12	1/4	12	21.0	23.4	29.4	38.0	11	21	60℃
P08-C40303-6	3/8	6	12.5	16.8	19.8	29.8	12	17	60℃
P08-C40303-8	3/8	8	14.5	18.4	24.7	31.0	12	17	60℃
P08-C40303-10	3/8	10	17.5	20.2	27.0	32.0	12	17	60℃
P08-C40303-12	3/8	12	21.0	23.4	29.7	32.5	12	17	60℃
P08-C40304-10	1/2	10	17.5	20.2	26.2	40.0	15	21	60℃
P08-C40304-12	1/2	12	21.0	23.4	29.4	42.0	15	21	60℃

■ 快插接头（内孔六角L式） P08-C404

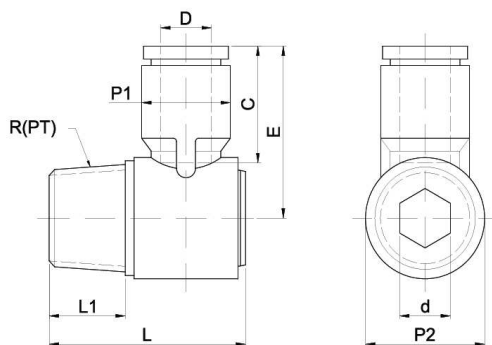

[单位: mm]

型号选择 型号	R(PT)	适用软管 外径 D	P1	P2	C	E	L	L1	六角内孔 d	温度
P08-C40401-6	1/8	6×4	13	14.3	17.0	23.7	24.0	8	5	60℃
P08-C40401-8	1/8	8×6	14	17.9	18.1	26.7	27.0	8	8	60℃
P08-C40402-6	1/4	6×4	13	14.3	17.0	23.7	27.0	11	5	60℃
P08-C40402-8	1/4	8×6	14	17.9	18.1	26.7	30.0	11	8	60℃
P08-C40402-10	1/4	10×7.5	18	21.3	20.7	30.7	34.0	11	10	60℃
P08-C40403-8	3/8	8×6	14	17.9	18.1	26.7	31.0	12	8	60℃
P08-C40403-10	3/8	10×7.5	18	21.3	20.7	30.7	35.0	12	10	60℃
P08-C40403-12	3/8	12×9	21	26.3	23.4	36.4	39.0	12	12	60℃
P08-C40404-12	1/2	12×9	21	26.3	23.4	36.4	42.0	15	12	60℃