


■ 快插接头（内孔六角高温式） P08-C406

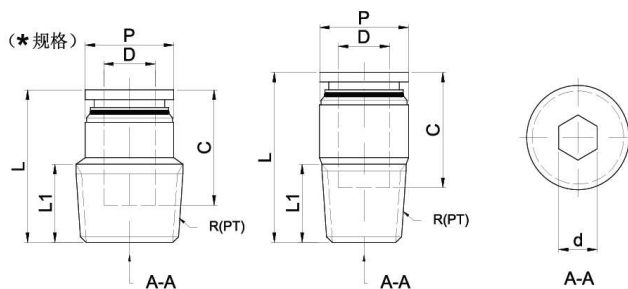

[单位: mm]

型号选择 型号	R (PT)	适用软管 外径 D	P	C	L	L1	六角内孔 d	温度	(图示)	
P08-C40601-4	1/8	4	9.9	14.5	20.6	8	2.5	100℃		
P08-C40601-6	1/8	6	11.9	16.6	22.2	8	4	100℃		
P08-C40601-8	1/8	8	13.9	17.7	27.4	8	5	100℃		
P08-C40601-10	1/8	10	16.9	20.0	30.1	8	5	100℃		
P08-C40602-4	1/4	4	14.0	14.5	21.6	11	2.5	100℃	*	
P08-C40602-6	1/4	6	13.9	16.6	22.2	11	4	100℃	*	
P08-C40602-8	1/4	8	13.9	17.7	26.1	11	6	100℃		
P08-C40602-10	1/4	10	16.9	20.0	29.1	11	6	100℃		
P08-C40602-12	1/4	12	19.9	22.6	35.2	11	8	100℃		
P08-C40603-6	3/8	6	16.9	16.6	23.2	12	4	100℃	*	
P08-C40603-8	3/8	8	16.9	17.7	23.4	12	6	100℃	*	
P08-C40603-10	3/8	10	16.9	20.0	28.6	12	6	100℃		
P08-C40603-12	3/8	12	20.8	22.6	31.2	12	8	100℃	*	
P08-C40604-10	1/2	10	20.8	20.0	29.6	15	6	100℃	*	
P08-C40604-12	1/2	12	20.8	22.6	33.2	15	8	100℃	*	
P08-C40601-4-F	1/8	4	9.9	14.5	20.6	8	2.5	120℃		
P08-C40601-6-F	1/8	6	11.9	16.6	22.2	8	4	120℃		
P08-C40601-8-F	1/8	8	13.9	17.7	27.4	8	5	120℃		
P08-C40601-10-F	1/8	10	16.9	20.0	30.1	8	5	120℃		
P08-C40602-4-F	1/4	4	14.0	14.5	21.6	11	2.5	120℃	*	
P08-C40602-6-F	1/4	6	13.9	16.6	22.2	11	4	120℃	*	
P08-C40602-8-F	1/4	8	13.9	17.7	26.1	11	6	120℃		
P08-C40602-10-F	1/4	10	16.9	20.0	29.1	11	6	120℃		
P08-C40602-12-F	1/4	12	19.9	22.6	35.2	11	8	120℃		
P08-C40603-6-F	3/8	6	16.9	16.6	23.2	12	4	120℃	*	
P08-C40603-8-F	3/8	8	16.9	17.7	23.4	12	6	120℃	*	
P08-C40603-10-F	3/8	10	16.9	20.0	28.6	12	6	120℃		
P08-C40603-12-F	3/8	12	20.8	22.6	31.2	12	8	120℃	*	
P08-C40604-10-F	1/2	10	20.8	20.0	29.6	15	6	120℃	*	
P08-C40604-12-F	1/2	12	20.8	22.6	33.2	15	8	120℃	*	