


■ 快插接头（普通高温L式） P08-C407

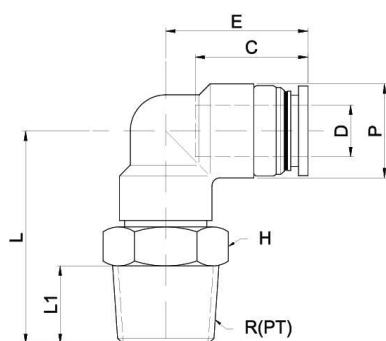

[单位: mm]

型号选择 型号	R(PT)	适用软管 外径 D	P	C	E	L	L1	H	温度
P08-C40701-4	1/8	4	10.5	14.5	17.6	22.8	8	10	100℃
P08-C40701-6	1/8	6	12.5	16.5	20.1	25.0	8	12	100℃
P08-C40701-8	1/8	8	14.5	17.7	22.3	28.0	8	14	100℃
P08-C40701-10	1/8	10	18.5	20.0	26.1	32.5	8	17	100℃
P08-C40702-4	1/4	4	10.5	14.5	17.6	25.8	11	14	100℃
P08-C40702-6	1/4	6	12.5	16.5	20.1	28.0	11	14	100℃
P08-C40702-8	1/4	8	14.5	17.7	22.3	31.0	11	14	100℃
P08-C40702-10	1/4	10	18.5	20.0	26.1	35.5	11	17	100℃
P08-C40702-12	1/4	12	21.5	22.6	29.7	37.5	11	21	100℃
P08-C40703-6	3/8	6	12.5	16.5	20.1	29.8	12	17	100℃
P08-C40703-8	3/8	8	14.5	17.7	22.3	32.8	12	17	100℃
P08-C40703-10	3/8	10	18.5	20.0	26.1	36.5	12	17	100℃
P08-C40703-12	3/8	12	21.5	22.6	29.7	38.5	12	21	100℃
P08-C40704-10	1/2	10	18.5	20.0	26.1	39.5	15	22	100℃
P08-C40704-12	1/2	12	21.5	22.6	29.7	41.5	15	22	100℃
P08-C40701-4-F	1/8	4	10.5	14.5	17.6	22.8	8	10	120℃
P08-C40701-6-F	1/8	6	12.5	16.5	20.1	25.0	8	12	120℃
P08-C40701-8-F	1/8	8	14.5	17.7	22.3	28.0	8	14	120℃
P08-C40701-10-F	1/8	10	18.5	20.0	26.1	32.5	8	17	120℃
P08-C40702-4-F	1/4	4	10.5	14.5	17.6	25.8	11	14	120℃
P08-C40702-6-F	1/4	6	12.5	16.5	20.1	28.0	11	14	120℃
P08-C40702-8-F	1/4	8	14.5	17.7	22.3	31.0	11	14	120℃
P08-C40702-10-F	1/4	10	18.5	20.0	26.1	35.5	11	17	120℃
P08-C40702-12-F	1/4	12	21.5	22.6	29.7	37.5	11	21	120℃
P08-C40703-6-F	3/8	6	12.5	16.5	20.1	29.8	12	17	120℃
P08-C40703-8-F	3/8	8	14.5	17.7	22.3	32.8	12	17	120℃
P08-C40703-10-F	3/8	10	18.5	20.0	26.1	36.5	12	17	120℃
P08-C40703-12-F	3/8	12	21.5	22.6	29.7	38.5	12	21	120℃
P08-C40704-10-F	1/2	10	18.5	20.0	26.1	39.5	15	22	120℃
P08-C40704-12-F	1/2	12	21.5	22.6	29.7	41.5	15	22	120℃