



■ 快插接头（分体式） P08-C408

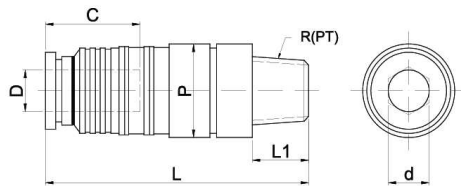

[单位: mm]

型号选择 型号	R(PT)	适用软管 外径 D	P	C	L	L1	六角内孔 d	温度		
P08-C40801-6	1/8	6	15.0	17.0	44.0	8	5	99℃		
P08-C40801-8	1/8	8	18.0	18.5	49.5	8	5	99℃		
P08-C40801-10	1/8	10	18.0	21.0	52.0	8	5	99℃		
P08-C40801-12	1/8	12	18.0	23.5	61.0	8	5	99℃		
P08-C40802-6	1/4	6	15.0	17.0	45.5	11	6	99℃		
P08-C40802-8	1/4	8	18.0	18.5	51.5	11	8	99℃		
P08-C40802-10	1/4	10	18.0	21.0	54.0	11	8	99℃		
P08-C40802-12	1/4	12	18.0	23.5	63.0	11	8	99℃		
P08-C40803-8	3/8	8	18.0	18.5	51.5	12	8	99℃		
P08-C40803-10	3/8	10	18.0	21.0	54.0	12	8	99℃		
P08-C40803-12	3/8	12	18.0	23.5	63.0	12	8	99℃		

■ 快插接头（分体L式） P08-C409

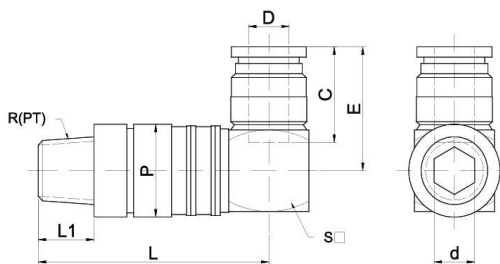

[单位: mm]

型号选择 型号	R(PT)	适用软管 外径 D	P	C	E	S	L	L1	六角内孔 d	温度
P08-C40901-6	1/8	6	15	17.0	22.0	12.0	37.0	8	5	99℃
P08-C40901-8	1/8	8	18	18.5	24.0	14.0	43.5	8	5	99℃
P08-C40901-10	1/8	10	18	21.0	28.0	17.0	45.0	8	5	99℃
P08-C40901-12	1/8	12	18	23.5	31.0	20.0	50.5	8	5	99℃
P08-C40902-6	1/4	6	15	17.0	22.0	12.0	38.5	11	6	99℃
P08-C40902-8	1/4	8	18	18.5	24.0	14.0	45.5	11	8	99℃
P08-C40902-10	1/4	10	18	21.0	28.0	17.0	47.0	11	8	99℃
P08-C40902-12	1/4	12	18	23.5	31.0	20.0	52.5	11	8	99℃
P08-C40903-8	3/8	8	18	18.5	24.0	14.0	45.5	12	8	99℃
P08-C40903-10	3/8	10	18	21.0	28.0	17.0	47.0	12	8	99℃
P08-C40903-12	3/8	12	18	23.5	31.0	20.0	52.5	12	8	99℃